SHEAREX

PRODUCT CATALOG



WHY CHOOSE SHEAREX?

Choosing Shearex means investing in equipment designed to last and perform in the most demanding conditions. Our mulchers feature a G2.0-balanced rotor, Hardox® 500 steel in critical wear areas, and patented Convex DX™ for increased reliability. Each machine is delivered job-ready, and—on VM models—with a standard hydraulic door. Startup is included in most of our mulchers. Add to that an innovative oil cooling system, fast access to wear parts, and on-site technical support. Get solutions built to maximize efficiency, longevity, and uptime.





TABLE OF CONTENTS

MULCHERS

6	**Front Mount Bite Limiter Mulcher**
8	**Solid Drum Mulcher**
10	**Excavator Bite Limiter Mulcher**
12	**Excavator Light Duty Bite Limiter Mulcher**
14	**Startup Service**
14	**Wear Parts**
15	**Blade Types**

LAND CLEARING ATTACHMENTS

18	**Harvester Shear**
19	**Stump Shear**
20	**Brush Grapple**
21	**Stump Grinder**
22	**Mini Tree Shear**
22	**Wood Cone Splitter**

INCLUDED STARTUP SERVICE

Every new Shearex mulcher* includes on-site setup by our technicians, who fine-tune it to your carrier and train your team on proper maintenance, at no additional cost.

Details on page 14.



CUSTOMER KIT

Every new Shearex mulcher ships with a kit built for its series: spare blades or hammers, hardware and a user manual.

Details on each model page.



*Not included with the VL Series.

Shearex is part of GRYB International, a group of companies offering attachment solutions in the material handling, forestry & land clearing, steel production & distribution, construction, and ag & light industrial industries.

GRYB · GRYB · BATEMAN · WINKLE · SHEAREX · SERCO LOADERS · e-Trak · RADTECH INNOVATION · DALKO TECH


DANGER STAND CLEAR 300'
SHEAREX



MULCHERS



FRONT MOUNT BITE LIMITER MULCHER

HM SERIES

Shearex's HM bite limiter mulcher is the ultimate attachment for fast, efficient roadside maintenance, invasive species removal, land clearing, and underbrush maintenance. Offers the speed and power to complete any land-clearing job.

G2.0 BALANCING STANDARD
ZERO VIBRATION ROTOR

Every Shearex mulcher is balanced to G2.0 quality, the highest balancing standard on the market. Optimal balance is crucial to minimize vibrations, premature bearing wear, and structural fatigue.

DOUBLE-BRACED BLADE HOLDERS


Through our patented Convex DX™ rotor configuration, a reinforcement ring is welded to each side of the blade holder, bracing it against deflection under load. The rings also limit cutting depth, reducing blade wear.

WEAR PROTECTION
BOLT-ON WEAR BLOCKS

A replaceable wear block sits under each blade, bolted rather than welded. When it wears, it comes off with a wrench — no cutting, no grinding, no downtime.





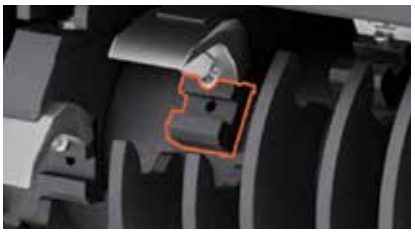

HYDRAULIC PUSH BAR

The optional hydraulic push bar helps you align and control material during mulching operations.

Built for heavy-duty work, it is available on the HM-70CV, HM-90SV and HM-100SV2, as well as on select HD models.



INCLUDED WITH ALL HM MULCHERS
CUSTOMER KIT

Shearex offers a customer kit with every HM Series mulcher purchase, including:

- **Spare blades**
- **Hardware**
- **DeWalt grinder**
- **Sharpening guide**
- **User manual**
- **Shearex cap**



IDEAL FOR LAND-CLEARING AND FORESTRY CONTRACTORS, MUNICIPALITIES, AND UTILITY SERVICES / HYDRO / ROAD MAINTENANCE



High visibility.

High-torque adjustable motor with a Poly-Chain® Carbon transmission belt.

Robust rotor design: thick plates and double reinforcement fins behind each blade holder for maximum durability.

Up to 100 inches cutting width.

Close center of gravity for better handling.

Optimized drain-line circuit: more oil is routed to the drain, reducing heat buildup and lowering oil temperature by 30 to 50°F.

Bolt-on liner and skid shoes made of Hardox® 500 for ultimate wear resistance. Easy maintenance or replacement.

		HM-60SR	HM-60DR	HM-70SR	HM-70DR	HM-70CV	HM-88LV	HM-90SV	HM-100SV2
Recommended Min. Carrier Power	HP (KW)	68 (50)	68 (50)	74 (55)	74 (55)	125 (95)	140 (104)	170 (127)	250 (190)
Cutting Width	IN (CM)	59 (149)	59 (149)	75 (190)	75 (190)	75 (190)	87 (220)	91 (230)	100 (254)
Cutting Dist. from Ground Level	IN (CM)	0.4 (1)	0.4 (1)	0.4 (1)	0.4 (1)	0.4 (1)	0.4 (1)	0.4 (1)	0.4 (1)
Number of Blades on Rotor		21	21	27	27	24	28	33	36
Optimal Target Material Diameter	IN (CM)	6 (15)	6 (15)	8 (20)	8 (20)	10 (25)	10 (25)	15 (40)	24 (60)
Exterior Length	IN (CM)	49.25 (125)	48 (122)	49.25 (125)	48 (122)	48.75 (124)	50 (126)	47 (118)	47 (118)
Exterior Height	IN (CM)	51 (129)	57 (145)	51 (129)	57 (145)	59 (150)	59 (150)	53 (134)	59 (150)
Exterior Width	IN (CM)	72 (183)	72 (183)	89 (226)	89 (226)	90 (229)	102 (259)	106 (269)	118 (300)
Rotor Diameter	IN (CM)	17.625 (45)	17.625 (45)	17.625 (45)	17.625 (45)	20 (50)	20 (50)	20 (50)	20 (50)
Approximate Weight	LB (KG)	2,300 (1,043)	2,450 (1,113)	3,000 (1,361)	3,285 (1,490)	3,640 (1,655)	3,880 (1,760)	4,272 (1,938)	5,094 (2,311)

HYDRAULICS

Variable Displacement Axial Piston Motor	CC	80	80	110	110	160	160	160	2x160
Min. Required Continuous Flow	GAL/MIN (L/MIN)	23 (87)	23 (87)	33 (125)	33 (125)	47 (178)	47 (178)	47 (178)	95 (360) for 160cc 70 (265) for 110cc
Max. Required Continuous Flow	GAL/MIN (L/MIN)	42 (159)	42 (159)	54 (204)	54 (204)	76 (288)	76 (288)	76 (288)	150 (568)
Max. Operating Pressure	PSI (BAR)	6,000 (414)	6,000 (414)	6,000 (414)	6,000 (414)	6,000 (414)	6,000 (414)	6,000 (414)	6,000 (414)
Rotating Speed	RPM	2,600	2,600	2,600	2,600	2,500	2,500	2,300	2,300

FEATURES

Hydraulic Push Bar	N/A	N/A	N/A	N/A	Optional	N/A	Optional	Optional
Door	N/A	Included	N/A	Included	N/A	N/A	N/A	N/A
Hydraulic Motor Option	N/A	N/A	N/A	N/A	N/A	N/A	N/A	2 x 110cc

This information is subject to change without notice.



FRONT MOUNT
SOLID DRUM MULCHER

HD SERIES

Shearex's HD solid drum mulcher is ideal for operation in loam, clay and rocky soils so you can easily push through dense vegetation.

With double carbide hammers, counter blades and Hardox® 500 bolt-on liner and skid shoes, the HD Solid Drum provides increased efficiency and durability. Take your land clearing capabilities to the next level with the unmatched performance of Shearex's solid drum mulcher.

The HD series mulcher is comprised of double carbide hammers and high-resistance carbide hammers on both ends for optimal durability and performance. Cutting edge counter blades provide maximum mulching efficiency and quality.

G2.0 BALANCING STANDARD
ZERO VIBRATION ROTOR

Every Shearex mulcher is balanced to G2.0 quality, the highest balancing standard on the market. Optimal balance is crucial to minimize vibrations, premature bearing wear, and structural fatigue.



DOUBLE AND HIGH-RESISTANCE CARBIDES

INCLUDED WITH ALL HD MULCHERS
CUSTOMER KIT

Shearex offers a customer kit with every HD Series mulcher purchase, including:

- **Spare hammers**
- **Hardware**
- **User manual**
- **Shearex cap**




IDEAL FOR CLEARING LAND WITH ROCKY, CLAYEY, OR HIGHLY ABRASIVE SOIL, AND SHREDDING STUMPS, ROOTS, AND DENSE VEGETATION.

High visibility.

High-torque adjustable motor with a Poly-Chain® Carbon transmission belt.

Robust rotor design with fast recovery under load.

Low rotor maintenance: carbide hammers never need sharpening and outlast cutting blades.

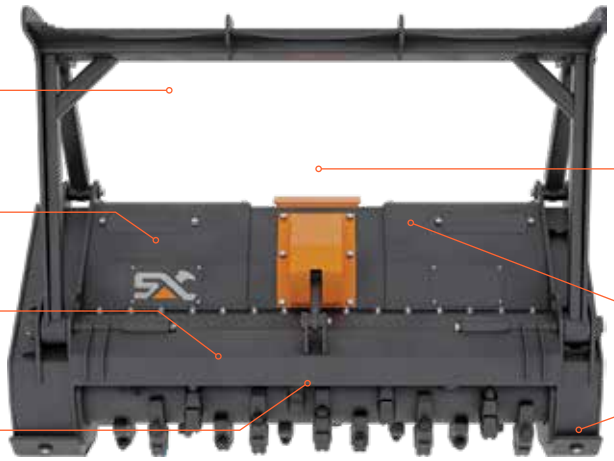

High-pressure hoses included, protected by a hose guard to keep them from snagging on branches.

Optimized drain-line circuit: more oil is routed to the drain, reducing heat buildup and lowering oil temperature by 30 to 50°F.

Hardox® 500 liner (bolt-on and welded options) and skid shoes for maximum wear resistance.

		HD-60SX	HD-70SY	HD-100DY2
Recommended Min. Carrier Power	HP (KW)	100 (75)	150 (112)	250 (190)
Cutting Width	IN (CM)	58.625 (149)	74.75 (190)	100 (254)
Cutting Dist. from Ground Level	IN (CM)	0.4 (1)	0.4 (1)	0.4 (1)
Number of Hammers		34	46	60
Optimal Target Material Diameter	IN (CM)	8 (20)	10 (25)	24 (60)
Exterior Length	IN (CM)	43.42 (110)	49.5 (126)	49.6 (126)
Exterior Height	IN (CM)	56.1 (142)	59.4 (151)	59.4 (151)
Exterior Width	IN (CM)	72.56 (184)	94 (239)	119 (302)
Rotor Diameter	IN (CM)	16.25 (41.3)	18 (45.7)	18 (45.7)
Approximate Weight	LB (KG)	2,815 (1,277)	4,200 (1,910)	5,500 (2,495)

HYDRAULICS

Variable Displacement Axial Piston Motor	CC	110	160	2 x 160
Min. Required Continuous Flow	GAL/MIN (L/MIN)	28 (106)	47 (178)	64 (242)
Max. Required Continuous Flow	GAL/MIN (L/MIN)	46 (174)	76 (288)	150 (568)
Max. Operating Pressure	PSI (BAR)	6,000 (414)	6,000 (414)	6,000 (414)
Rotating Speed	RPM	2,300	2,200	2,100

FEATURES

Hydraulic Push Bar	N/A	Optional	Optional
Door	Optional	Optional	Optional
Hydraulic Motor Option	N/A	N/A	2 x 110 CC
Bite Limiter Rotor	Optional	N/A	N/A

This information is subject to change without notice.



EXCAVATOR
BITE LIMITER MULCHER
VM SERIES



G2.0 BALANCING STANDARD
ZERO VIBRATION ROTOR
Every Shearex mulcher is balanced to G2.0 quality, the highest balancing standard on the market. Optimal balance is crucial to minimize vibrations, premature bearing wear, and structural fatigue.



DOUBLE-BRACED BLADE HOLDERS
Through our patented Convex DX™ rotor configuration, a reinforcement ring is welded to each side of the blade holder, bracing it against deflection under load. The rings also limit cutting depth, reducing blade wear.



INCLUDED WITH ALL VM MODELS
HYDRAULIC DOOR
The hydraulic door included on all VM models allows precise control of material flow, ensuring more efficient and consistent mulching.

OPTIONAL

COUPLING
Shearex provides a standard attachment bracket to couple the mulcher to the carrier. Shearex is also able to custom-build a coupler for any carrier brand.



OPTIONAL

GRAPPLE SYSTEM
Move and sort through smaller material or pile them up for greater mulching control.



OPTIONAL

TILTING SYSTEM
Essential tool for facilitating the operator's work at height, allowing them to easily visualize the rotor's trajectory.






INCLUDED WITH ALL VM MULCHERS
CUSTOMER KIT
Shearex offers a customer kit with every VM Series mulcher purchase, including:

- **Spare blades**
- **Hardware**
- **DeWalt grinder**
- **Sharpening guide**
- **User manual**
- **Shearex cap**

IDEAL FOR LAND-CLEARING AND FORESTRY CONTRACTORS, MUNICIPALITIES, AND UTILITY SERVICES / HYDRO / ROAD MAINTENANCE

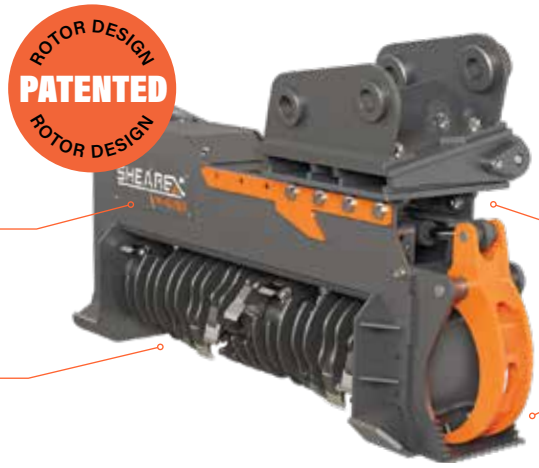

High-torque adjustable and variable motor with a Poly-Chain® Carbon transmission belt.

Robust rotor design: thick plates and double reinforcement fins behind each blade holder for maximum durability.

Optimized drain-line circuit: more oil is routed to the drain, reducing heat buildup and lowering oil temperature by 30 to 50°F.

Bolt-on liner made of Hardox® 500tuf for ultimate wear resistance. Easy maintenance and replacement. Available on select models.

		VM-25SK	VM-35SK	VM-40SL	VM-50SR	VM-60SR	VM-65SV
Excavator Size	T	5 to 8	6 to 12	12 to 15	15 to 20	20 to 25	25 to 40
Recommended Min. Carrier Power	HP (KW)	50 (37)	54 (40)	65 (48)	80 (59)	130 (96)	170 (127)
Cutting Width	IN (CM)	28 (70)	37 (95)	42 (107)	48 (123)	59 (149)	65 (165)
Cutting Dist. from Ground Level	IN (CM)	0.25 (0.64)	0.25 (0.64)	0.25 (0.64)	0.25 (0.64)	0.25 (0.64)	0.87 (2.2)
Number of Blades on Rotor		9	13	14	17	21	21
Optimal Target Material Dia.	IN (CM)	<5 (<12)	6 (15)	8 (20)	10 (25)	15 (40)	20 (50)
Door*		Hydraulic	Hydraulic	Hydraulic	Hydraulic	Hydraulic	Hydraulic
Exterior Width	IN (CM)	41 (104)	50 (127)	57 (145)	66 (168)	77 (194)	89 (225)
Exterior Height	IN (CM)	31 (77)	31 (77)	34 (85)	35 (89)	35 (89)	40 (102)
Exterior Length	IN (CM)	23 (58)	23 (58)	25 (65)	28 (71)	28 (71)	29 (74)
Rotor Diameter	IN (CM)	15 (38)	15 (38)	16 (41)	18 (45)	18 (45)	20 (50)
Approximate Weight	LB (KG)	1,100 (499)	1,307 (593)	1,668 (757)	2,150 (975)	2,614 (1,188)	3,707 (1,681)

HYDRAULICS

Variable Displacement Axial Piston Motor	CC	28	60	80	110	110	160
Min. Required Continuous Flow	GAL/MIN (L/MIN)	15 (57)	23 (87)	30 (114)	42 (159)	42 (159)	51 (193)
Max. Required Continuous Flow	GAL/MIN (L/MIN)	22 (83)	38 (144)	44 (167)	63 (238)	63 (238)	91 (344)
Max. Operating Pressure	PSI (BAR)	6,000 (414)	6,000 (414)	6,000 (414)	6,000 (414)	6,000 (414)	6,000 (414)
Rotating Speed	RPM	3,800	3,500	3,500	3,000	3,000	3,000

FEATURES

Tilt*		Optional	Optional	Optional	Optional	Optional	Optional
Grapple*		-	Optional	Optional	Optional	Optional	Optional
Heel		Optional	Optional	Optional	Optional	Optional	Optional



***Door -** Requires 1 auxiliary hydraulic line (pressure plus return) and 1 case drain. A diverter valve is included for door control. Electrical power (12V or 24V) must be supplied by the machine; wiring is included.

***Tilt -** A second double auxiliary hydraulic line is strongly recommended to allow medium pressure settings (2500 - 3000 PSI). Operation with a double diverter valve is possible but not recommended.

***Grapple -** Combination of tilt and grapple: Requires 2 double auxiliary hydraulic lines plus a case drain. Use of a triple diverter valve is not recommended due to poor performance.

This information is subject to change without notice.

SHEAREX

COMPACT EXCAVATOR
LIGHT DUTY BITE LIMITER MULCHER

VL SERIES

Poly-Chain® Carbon transmission belt.

Extremely durable oversized axles and bearings.

Bolt-on anvil for easy replacement and added durability.

No additional hydraulic line installation required.

Internal shell/ wear plate made of Hardox® 500 for ultimate wear resistance.




Durable, drainless piston motor built to withstand maximum pressure up to 5,800 PSI and return line pressure up to 360 PSI.

		VL-20SC	VL-30SC	VL-40SC
Excavator Size	T	2 to 4	3 to 7	6 to 10
Recommended Min. Carrier Power	HP (KW)	20 (15)	30 (22)	47 (35)
Cutting Width	IN (CM)	21.25 (54)	31 (78)	40 (101)
Cutting Distance From Ground Level	IN (CM)	0.25 (0.64)	0.25 (0.64)	0.25 (0.64)
Number of Blades on Rotor		8	12	16
Optimal Target Material Diameter	IN (CM)	<3 (<7.5)	<4 (<10)	<5 (<12)
Floating Door		Mechanical	Mechanical	Mechanical
Exterior Width	IN (CM)	32.5 (83)	42 (107)	51 (129)
Exterior Height	IN (CM)	22.75 (58)	22.75 (58)	22.75 (58)
Exterior Length	IN (CM)	18 (45)	18 (45)	18 (45)
Rotor Diameter	IN (CM)	13 (33)	13 (33)	13 (33)
Approximate Weight	LB (KG)	430 (195)	550 (249)	735 (334)
HYDRAULICS				
Fixed Axial Piston Motor	CC	12 (18 optional)	18	32
Min. Required Continuous Flow	GAL/MIN (L/MIN)	8 (30)	13 (49)	22 (83)
Max. Required Continuous Flow	GAL/MIN (L/MIN)	18 (68)	18 (68)	34 (129)
Max. Operating Pressure	PSI (BAR)	5,800 (400)	5,800 (400)	5,800 (400)
Rotating Speed	RPM	3,500	3,500	3,500
Pulley Ratio		1:1	1:1	1:1
Pressure Line I.D.	# (IN)	#10 (0.625)	#10 (0.625)	#12 (0.75)
Return Line I.D.	# (IN)	#10 (0.625)	#10 (0.625)	#12 (0.75)
Drain Line I.D.	# (IN)	-	-	-
FEATURES				
Heel		Optional	Optional	Optional
Debris Curtain		Optional	Optional	Optional

This information is subject to change without notice.

IDEAL FOR OCCASIONAL LAND CLEARING OPERATIONS, INVASIVE SPECIES REMOVAL AND ROAD MAINTENANCE.



INCLUDED WITH ALL VL MULCHERS

CUSTOMER KIT

Every VL mulcher comes with a complimentary kit packed with essentials to get you up and running.

- **Spare blades**
- **Hardware**
- **Sharpening guide**
- **User manual**
- **Shearex cap**

Also available is the VL Series optional Sharpening Kit that comes in a DeWalt TOUGHSYSTEM 2.0 case and includes a DeWalt grinder, a steel sharpening disc, and 3M Cubitron discs.
The sharpening kit is available at an additional cost.

INCLUDED SHEAREX MULCHER STARTUP SERVICE

At Shearex, we're dedicated to ensuring your mulcher delivers top performance from day one. That's why every new mulcher purchase comes with our comprehensive Startup Service* at **no additional cost.** Our expert technicians will travel to your site to fine-tune the mulcher to your carrier for maximum efficiency.

We also provide a quick training session on proper maintenance techniques, helping you extend the lifespan of your equipment.

With Shearex, you get more than just a mulcher—you get unmatched support for optimal results.

*The Startup Service is not included with the VL Series.



WEAR PARTS

Wear parts are made to wear. But knife hardware, bearing assemblies and skids don't fail all at once. They wear down gradually, costing you extra passes, extra fuel and cut quality long before you suspect the machine.

Shearex wear parts are built for the field and designed for fast replacement, so your mulcher gets back to full capacity with minimal downtime.

Keep the essentials on hand.
Contact your Shearex rep to get the parts you need.




BLADE TYPES

Depending on your operation, choose between our different blade types when ordering your mulcher to provide maximum durability to your equipment.

BITE LIMITER SHARP TEETH


Our advanced **cutting blades** are available for all your land clearing and forestry applications in regions with fine textured soils where high efficiency is key. Offered in both standard and high abrasion resistant materials, ensuring Shearex has the perfect pairing for your application. Choose between Type 10 and Type 20 blades.

TYPE 10 BLADES

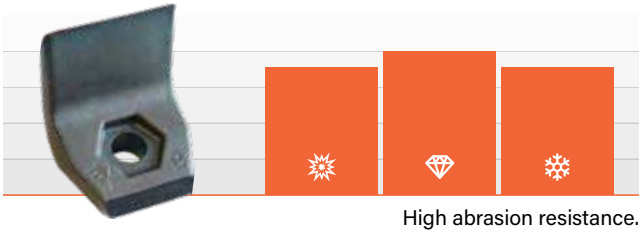


High abrasion resistance.

TYPE 20 BLADES

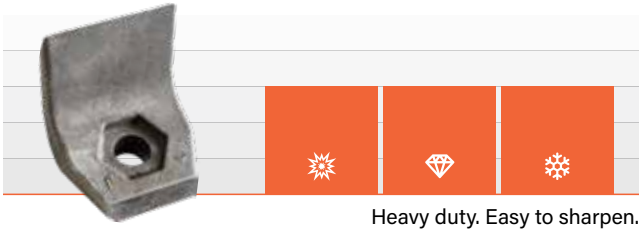


Heavy duty. Easy to sharpen.
High impact resistance.

TYPE 20 BLADES - VL SERIES ONLY

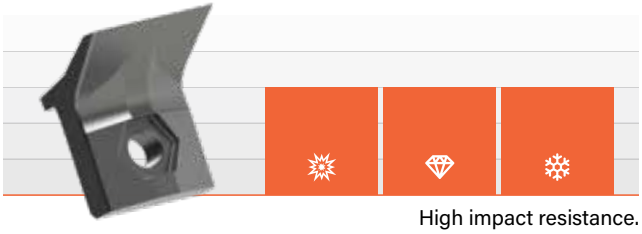

High impact resistance.

TYPE 10 BOLT-ON BLADE - HD SERIES ONLY

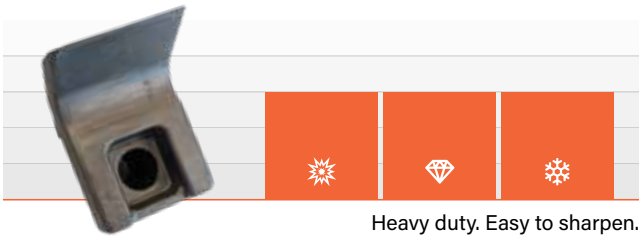


Heavy duty. Easy to sharpen.
High impact resistance.

SOLID DRUM HAMMERS

The HD Series solid drum mulcher is comprised of **central** and **lateral hammers**, for optimal performance and durability. High-resistance hammers are located on both ends of the rotor to maximize your mulching operations.

CENTRAL HAMMERS (HD SERIES ONLY)

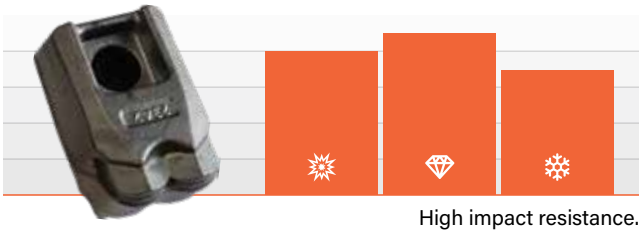

High impact resistance.

LATERAL HAMMERS (HD SERIES ONLY)




High impact resistance.
High resistance edges.

BITE LIMITER CARBIDE TEETH

Shearex **carbide blades** are available for all of your land clearing operations. Choose these blades for land clearing near roads, where asphalt parts can be found, or in fields where the ground could be more rocky. These blades provide groundbreaking durability to your equipment.

CARBIDE BLADES

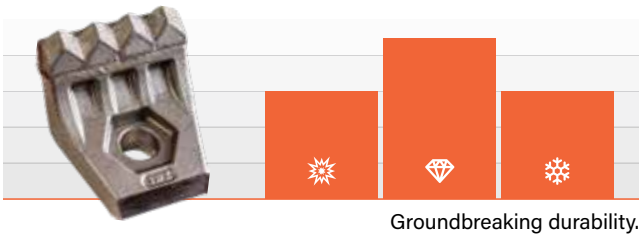

Groundbreaking durability.

IMPACT RESISTANCE | ABRASION RESISTANCE | COLD RESISTANCE


SHEAREX
THG 310



LAND CLEARING ATTACHMENTS



WARRANTY 2 YEAR

HARVESTER SHEAR

FHS SERIES

Finish your land clearing jobs in-depth by uprooting and cutting roots, stumps, and biomass beyond the reach of your other land clearing tools.


LOW MAINTENANCE

EXTREME CUTTING FORCE

REINFORCED BLADES

LARGE-BORE HYDRAULIC CYLINDER

TWO-SPEED REGENERATION CIRCUIT*

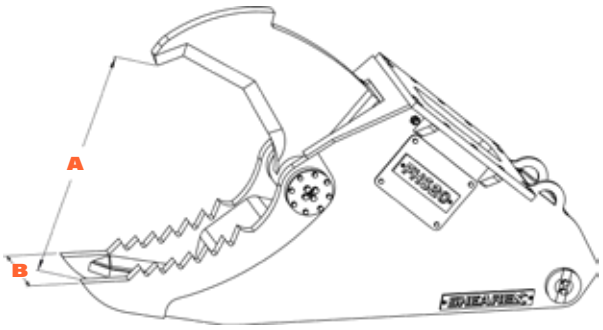

MODEL	CARRIER SIZE T	WEIGHT LB (KG)	OPENING IN (MM) A	WIDTH IN (MM) B	DEPTH IN (MM)	PRESSURE PSI (BAR)	FORCE T
FHS20	15-25	2,760 (1,255)	39 (990)	15 (381)	28 (711)	5,000 (345)	30
FHS30	25-35	5,650 (2,568)	55 (1,400)	18 (457)	37 (940)	5,000 (345)	45

This information is subject to change without notice. *Available on the FHS30 only.




STUMP SHEAR

SS SERIES

The Shearex stump shear is perfect for land clearing, with welded teeth designed to uproot, break down, and split large stumps into manageable pieces for shredding. Tackle tough stumps efficiently and finish your job in-depth with ease.

POWERFUL GRIP

AVAILABLE IN HYDRAULIC OR MECHANICAL CONFIGURATIONS

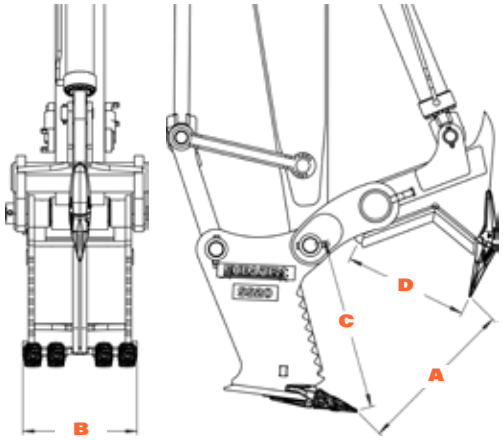

MODEL	CARRIER SIZE T	WEIGHT LB (KG)	OPENING IN (MM) A	WIDTH IN (MM) B	TIP RADIUS IN (MM) C	CUT LENGTH IN (MM) D	MECHANICAL CONFIG.
SS16	12-16	2,315 (1,050)	52 (1,321)	22 (559)	32 (813)	21 (533)	Available
SS20	15-24	2,811 (1,275)	58 (1,473)	25 (635)	34 (864)	24 (610)	Available
SS27	18-25	3,858 (1,750)	64 (1,626)	30 (762)	42 (1,067)	30 (762)	Available

This information is subject to change without notice.



WARRANTY 1 YEAR

BRUSH GRAPPLE

BG SERIES

Introducing the brush grapple by Shearex, a powerful and versatile tool designed to excel in forestry, recycling, scrap yards, construction, agriculture, and storm cleanup applications. Featuring an open-end design, it allows you to handle a wide range of materials, from logs and brush to roots and bulky debris. With twin hydraulic cylinder grapple arms protected by guards and operating under 3000 PSI of pressure, this attachment provides exceptional heavy-duty capacity for any job.

PROTECTED CYLINDERS

3000 PSI CYLINDER DOUBLE GRAPPLE

HYDRAULIC HOSE GUARD

UNIVERSAL SKID STEER ATTACHMENT

SPECIFICATIONS		BG-60	BG-72	BG-83HD
Overall Width	IN (CM)	60 (152)	72 (183)	83 (211)
Grapple Open Height	IN (CM)	38 (97)	38 (97)	37 (94)
Grapple Closed Height	IN (CM)	16.75 (43)	16.75 (43)	16 (41)
Overall Depth	IN (CM)	39 (99)	39 (99)	36 (91)
Weight	LB (KG)	750 (340)	825 (374)	1,150 (522)
Number of Tines		9	11	16
Tine Spacing	IN (CM)	7 (18)	6.75 (17)	5 (13)



This information is subject to change without notice.

STUMP GRINDER

SG SERIES



The Shearex stump grinder has been designed for maximum efficiency, unrivaled speed and minimal impact on the environment. With Shearex, no time is wasted on clean-up: our stump grinder quickly pulverizes stumps and buried residues, leaving your work sites clean and ready for new planting or maintenance vehicle traffic.

Blade system interchangeable **in less than 5 minutes.**

Adapt your equipment to different applications and **softwood or hardwood.**

Equipped with a high-performance, **low-maintenance motor** guaranteeing constant, reliable power every time.

Our advanced technology and Hardox® 500 blades will ensure you meet the demands of the toughest jobs, while respecting the environment.

Rapid availability of wear and replacement parts: You don't have to worry about long waiting times - everything you need is at hand to keep your equipment up and running.

AVAILABLE BLADE TYPES



Standard Straight Blades



Notched Blades

SPECIFICATIONS		SG15	SG24	SG34
Carrier Size	T	3-6	6-14	12-30
Cut Diameter	IN (MM)	15 (380)	24 (600)	34 (860)
Maximum Pressure	PSI (BAR)	5,500 (379)	5,500 (379)	5,500 (379)
Maximum Hydraulic Flow	GAL/MIN (L/MIN)	10-25 (38-100)	14-35 (53–132)	22-50 (83–189)
Minimum Speed	RPM	50	35	35
Maximum Speed	RPM	110	60	50
Maximum Torque*	FT-LB (Nm)	10,500 (14,250)	13,000 (17,626)	32,000 (43,386)
Cone Splitter Diameter (Optional)	IN	14	16	16

This information is subject to change without notice. * Maximum torque may vary depending on maximal pressure.

SHEAREX

MINI TREE SHEAR

FTS SERIES



The Shearex mini tree shear cuts whole trees in seconds. Its powerful, replaceable blade lets you fell and move trees quickly, ready for transport and processing.
A simple way to boost your forestry output.

SHEAR TREES UP TO 7" DIAMETER

POWERFUL GRIP & CUT

EASY MAINTENANCE

ACCUMULATOR INCLUDED

	CARRIER SIZE T	WEIGHT LB (KG)	OPENING IN (MM)	GRAPPLING IN (MM)	HEIGHT IN (MM)	FORCE T	PRESSURE PSI (BAR)	HYD. FLOW GAL/MIN (L/MIN)
FTS07	5-9	950 (431)	35 (889)	35 (889)	24 (609)	11	3,191 (220)	13-15 (50–57)

This information is subject to change without notice.

WOOD CONE SPLITTER

SC SERIES



The Shearex wood cone splitter makes quick work of large logs, stumps and roots. Its robust design and replaceable tips keep production moving, splitting material down before it goes into your shredder.

IMPRESSIVE SPLITTING POWER

REPLACEABLE TIP

EASY MAINTENANCE

IDEAL FOR FORESTRY

SPECIFICATIONS		SC15	SC34
Carrier Size	T	3 to 9	10 to 30
Weight	LB (KG)	700 (318)	1,650 (750)
Cone Diameter	IN (MM)	13.5 (343)	15.5 (394)
Height	IN (MM)	22 (559)	25 (635)
Pressure	PSI (BAR)	5,000 (350)	5,000 (350)
Hyd. Flow	GAL/MIN (L/MIN)	10-25 (38-100)	20-50 (75-190)
Torque	FT-LB (NM)	10,500 (14,236)	10,500 (14,236)
Stump Grinder		Optional	Optional

This information is subject to change without notice.

OPTIONAL STUMP GRINDER




SHEAREX
SHEAREX

SHEAREX | GRYB

1-579-213-0350 - INFO@SHEAREX.CA

FOLLOW US

325, rue de l'Église, Roxton Falls (Québec) J0H 1E0

SHEAREX.CA

SH-CA-ALL_PRODUCT-E-27-01